

# (12) UK Patent Application (19) GB (11) 2 269 298 (13) A

(43) Date of A Publication 02.02.1994

(21) Application No 9216044.9

(22) Date of Filing 28.07.1992

(71) Applicant(s)  
Hutchison Telephone Company Limited

(Incorporated in Hong Kong)

G/F Citicorp Centre, 18 Whitfield Road, North Point,  
Hong Kong

(72) Inventor(s)  
Henry K H Wong

(74) Agent and/or Address for Service  
Marks & Clerk  
57-60 Lincoln's Inn Fields, LONDON, WC2A 3LS,  
United Kingdom

(51) INT CL<sup>5</sup>  
H04B 7/26

(52) UK CL (Edition M )  
H4L LDSF L41X

(56) Documents Cited  
GB 2234142 A

(58) Field of Search  
UK CL (Edition K ) H4L LDSF LDSF  
INT CL<sup>5</sup> H04B 7/24 7/26 17/00

## (54) Optimizing channel selection in cellular telephone networks

(57) In a cellular telephone network the selection of channels of the same frequency for re-use elsewhere in the network is optimized by a statistical method in which the geographical area covered by the network is subdivided into a large number of small sub-areas of generally equal shape and size. The strength of signals received from transmitters within the network is measured at each accessible sub-area and the source of the strongest signal for the sub-area is defined as the serving cell-site centre and the remaining signals as interferer signals. Carrier to interference (CIR) ratios are thereafter calculated and compared to a predetermined minimum acceptable level of CIR for the network. For each cell site of the network the total number of sub-areas in which signal strengths have been ascertained is aggregated and compared with the number of such sub-areas in which the actual CIR is above the minimum acceptable value, to thereby determine the probability of interference occurring in that cell with one or more signals received from other cell sites within the network if the same channel frequency is re-used. The method therefore provides a means to optimize channel selection by selecting a channel having the lowest probability of interference with signals from other cells using the same channel frequency in the network.

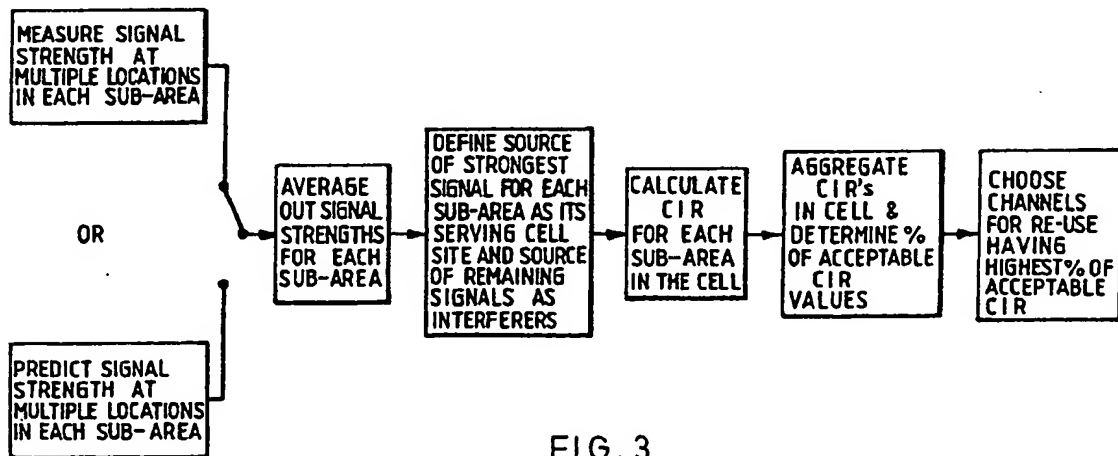


FIG. 3

At least one drawing originally filed was informal and the print reproduced here is taken from a later filed formal copy.

This print takes account of replacement documents submitted after the date of filing to enable the application to comply with the formal requirements of the Patents Rules 1990.

GB 2 269 298 A

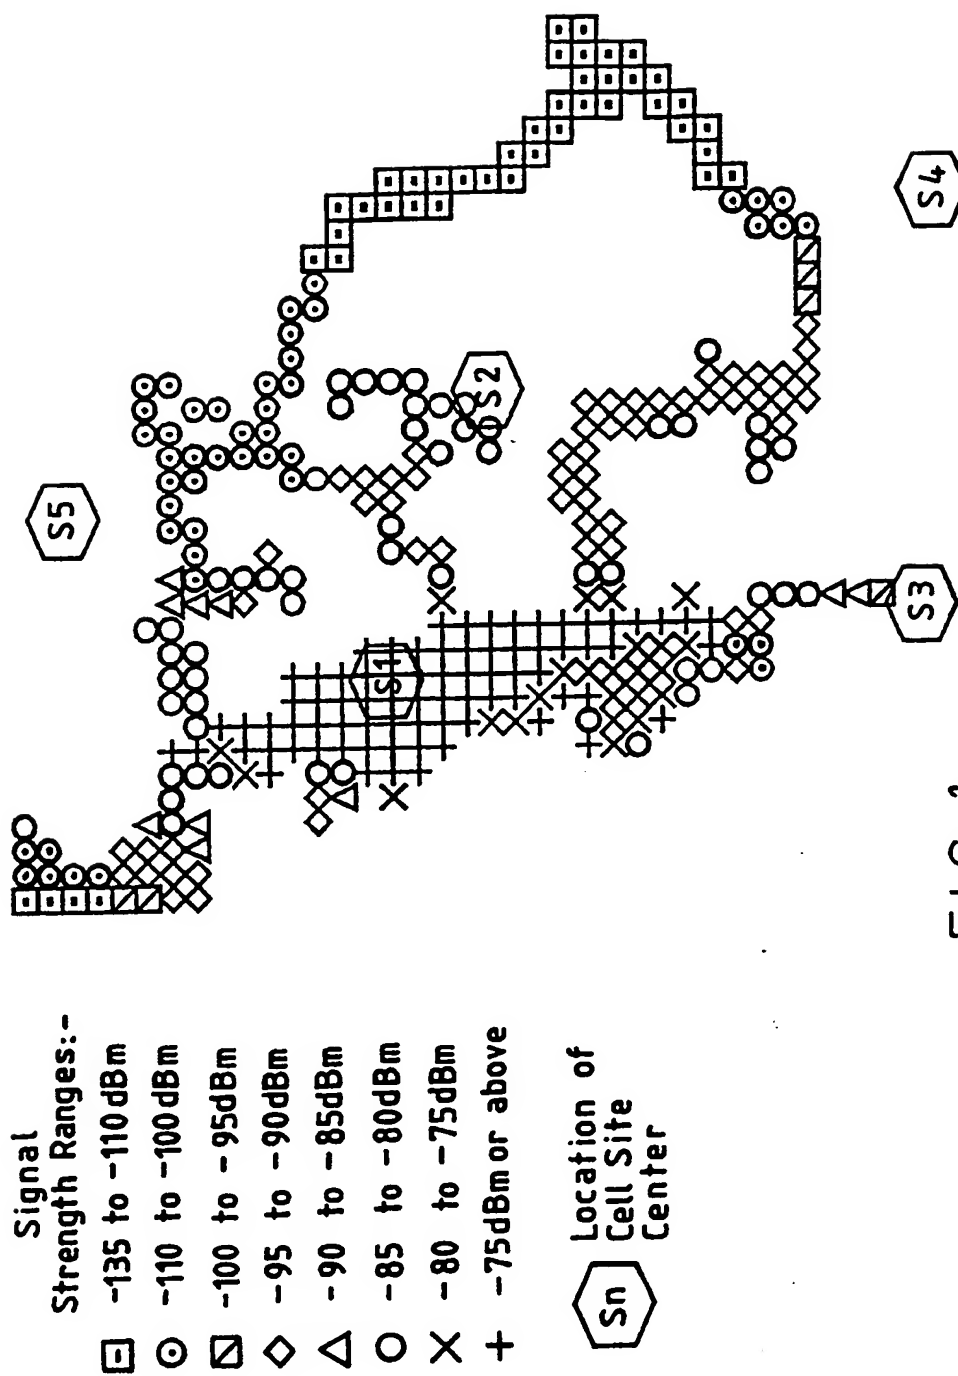
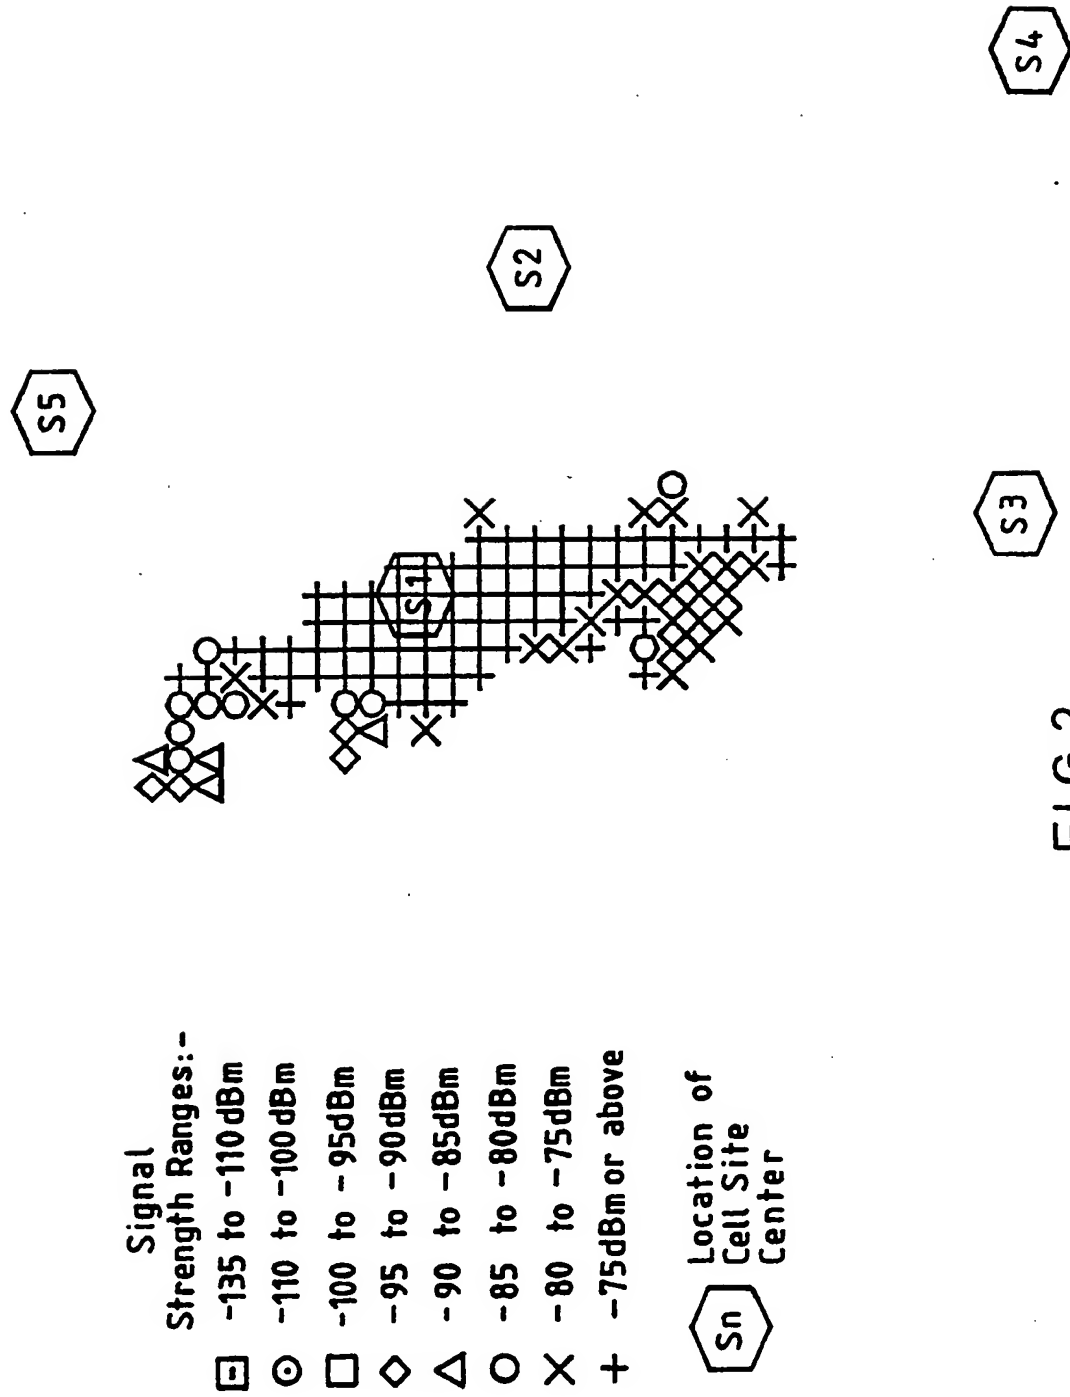


FIG.1



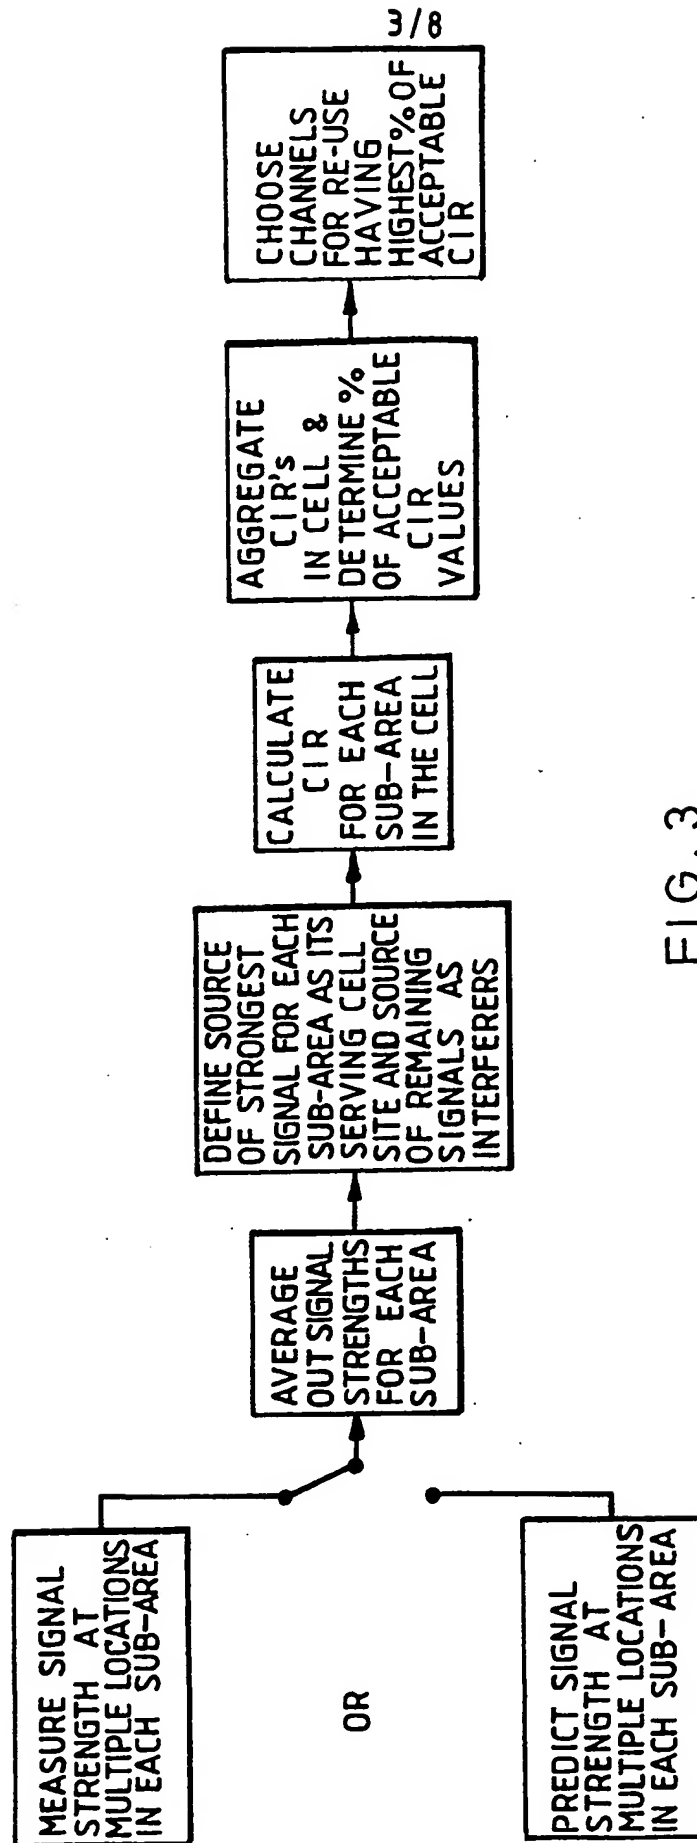


FIG. 3

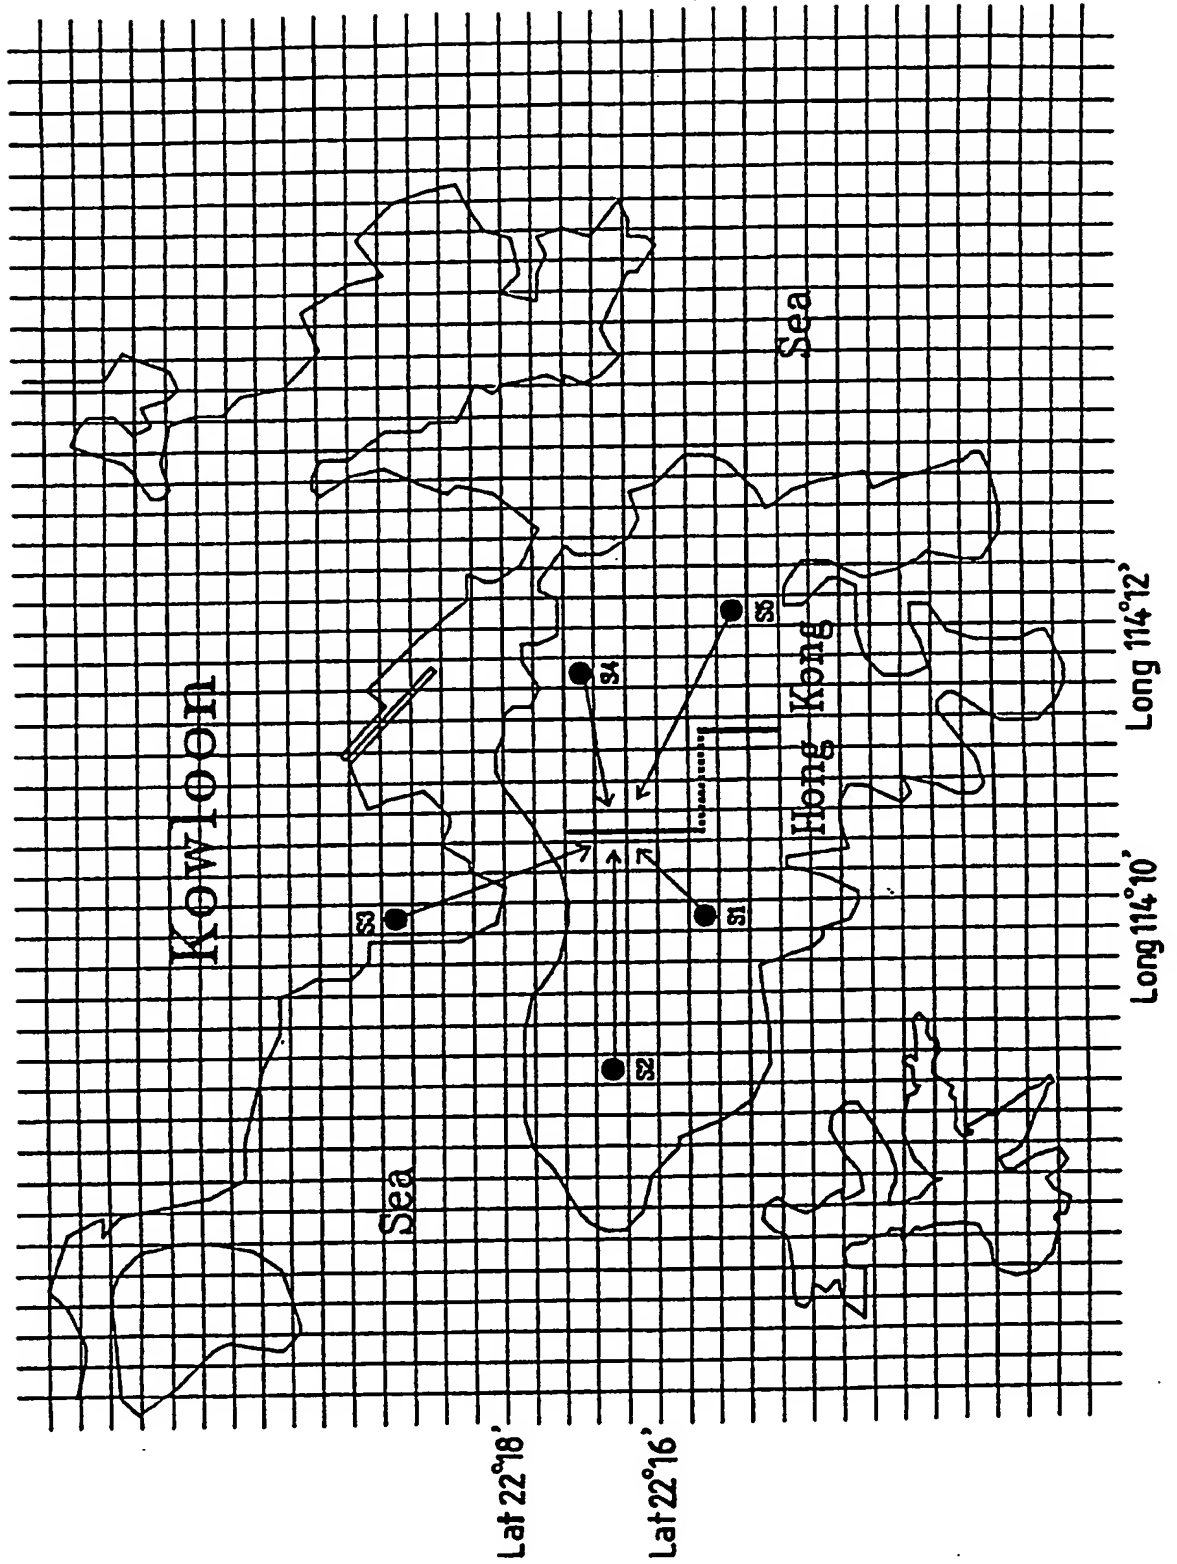


FIG.4

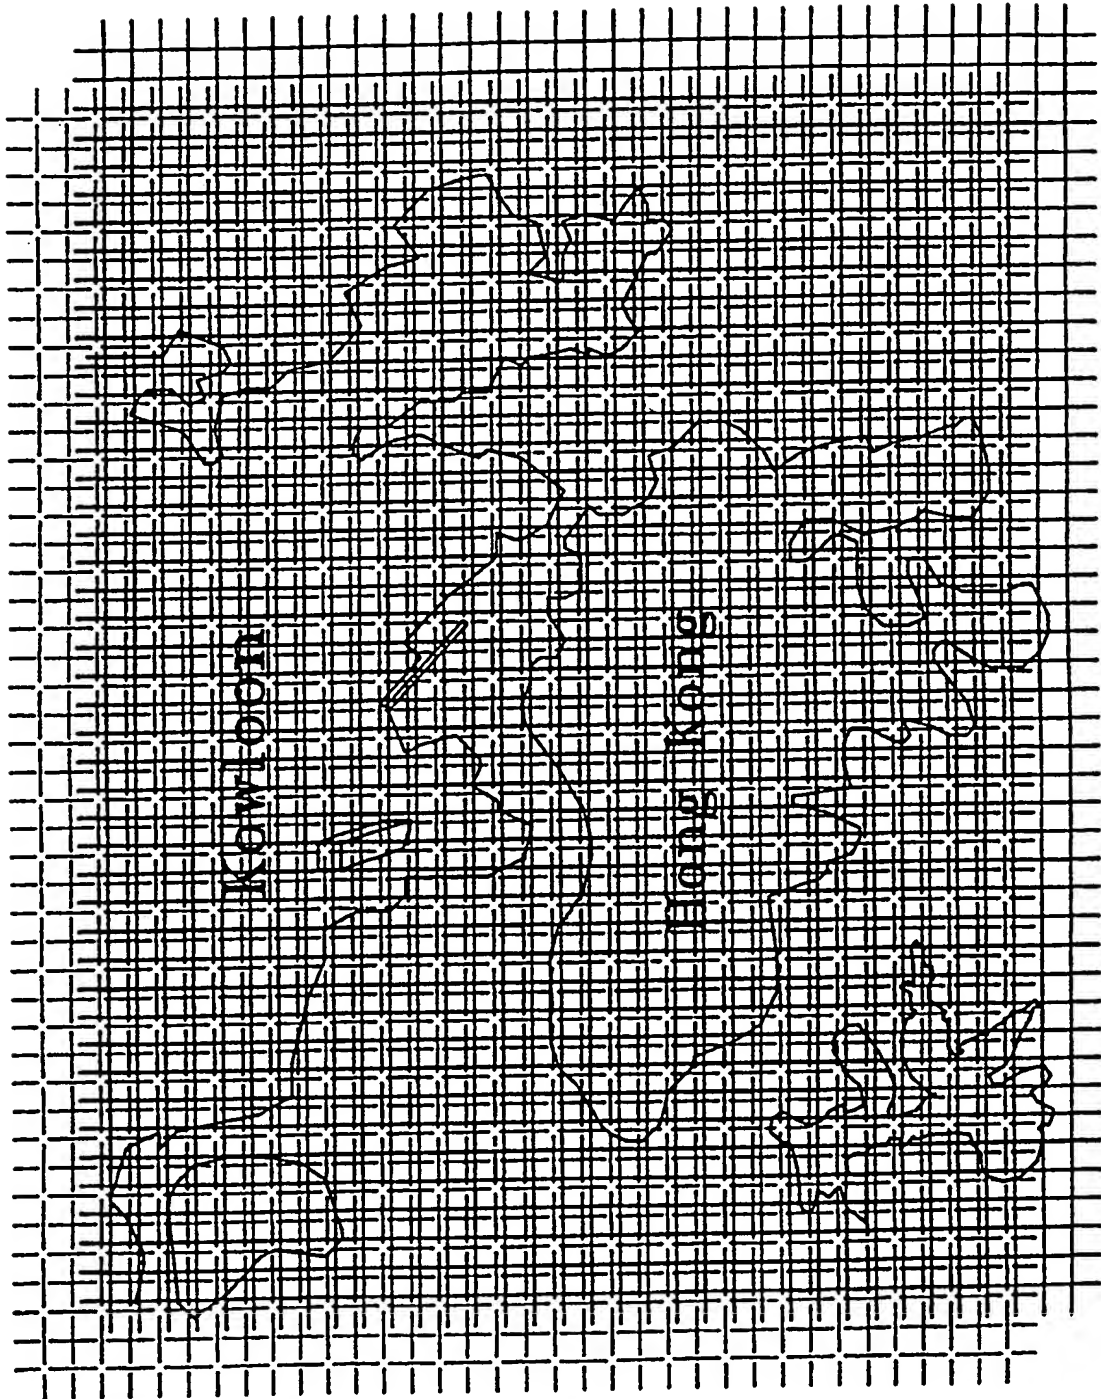


FIG.5

RECORD No.	LATITUDE	LONGITUDE	S1 (	S2	S3 dBm	S4	S5 )
1	22.309818N	114.169511E	-90	-115	-109	-114	-95
2	22.309901N	114.169149E	-78	-114	-93	-112	-80
3	22.310000N	114.168774E	-70	-114	-99	-101	-75
4	22.310420N	114.168778E	-75	-109	-97	-111	-78
.	.	.	.	.	.	.	.

FIG.6

Sub-area No.	LATITUDE	LONGITUDE	S1 (	S2	S3 dBm	S4	S5 )
1	22.309900N	114.169000E	-78	-113	-100	-110	-82
.	.	.	.	.	.	.	.

FIG.7

Confidence	S1	S2	S3	S4	S5
S1	0%	65%	90%	70%	59%
S2	60%	0%	83%	77%	75%
S3	88%	75%	0%	70%	97%
S4	70%	80%	72%	0%	35%
S5	62%	78%	95%	30%	0%

FIG.8

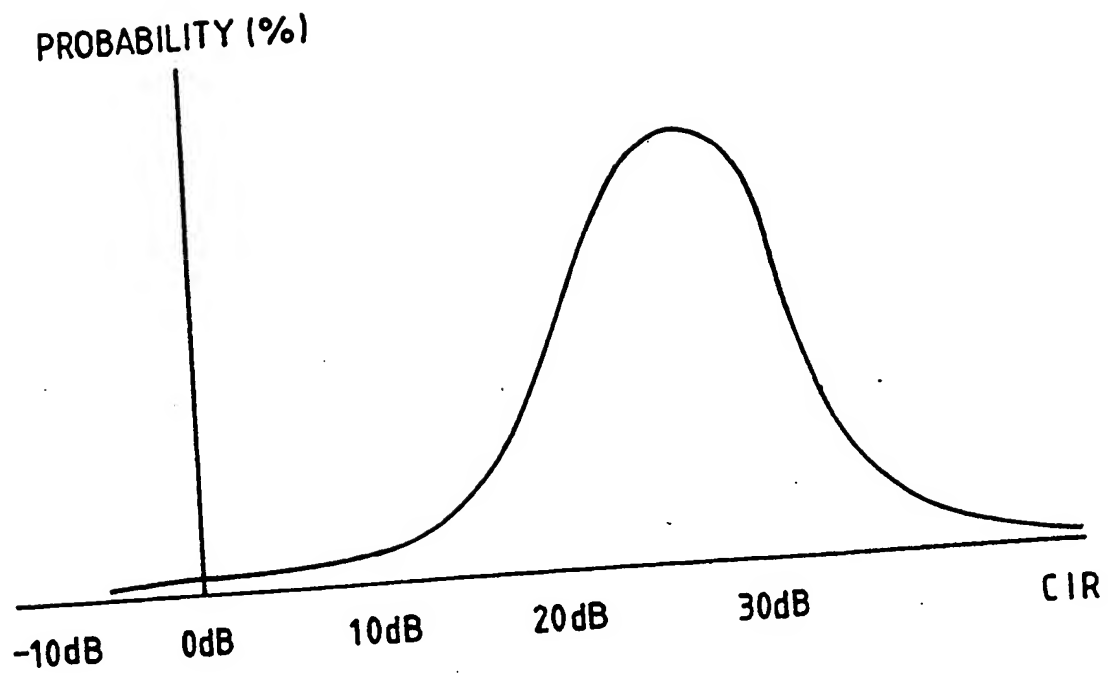


FIG. 9

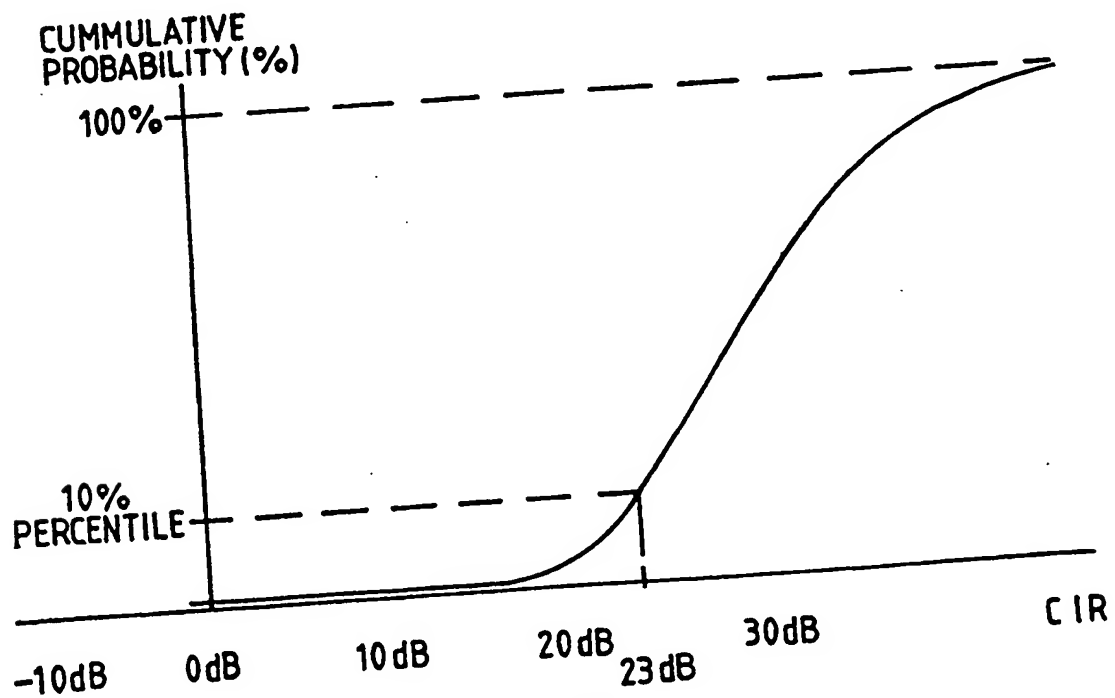


FIG. 10



Confidence	S1	S2	S3	S4	S5
S1	0dB	12dB	29dB	19dB	10dB
S2	14dB	0dB	23dB	20dB	18dB
S3	25dB	17dB	0dB	15dB	35dB
S4	16dB	21dB	20dB	0dB	4dB
S5	10dB	19dB	38dB	2dB	0dB

FIG.11

Method of Optimizing Channel Selection in  
Cellular Telephone Networks

5           This invention relates to cellular  
telephone networks and is primarily, but not  
exclusively, concerned with optimizing the selection  
of channels throughout part or all of such networks  
to minimize interference and maximize the performance  
and capacity of the network.

10           Cellular telephone networks stem from the  
realization that it is statistically improbable for a  
large number of subscribers to such a telephone  
system to be geographically close to each other at  
any given instant in time and/or would wish to make  
15       or receive radio telephone calls at the same time in  
the same location.

20           Given the finite number of radio channels  
which are available for use within radio telephone  
networks, the cellular network system provides a  
means whereby a very large number of calls can be  
made or received at the same time using a relatively  
small number of channels. To achieve this,  
short-range transmitters and receivers are installed

25

in a cell-like configuration over the entire area covered by the telephone network, each such cell having a different range of radio channels to that of a neighboring cell, but often the same as those of several other cells in the network.

Although the or each radio transmitter in each cell is relatively short-range, it will be appreciated that it would still be possible for signals of any particular channel to be picked up by receivers in nearby cells where the same channel is being reused, which can then lead to "cross-talk" interference during telephone calls. To minimize this undesirable effect it is necessary to ensure that the signal strength from a nearby cell using the same channel is sufficiently less than the signal strength for the same channel used in a particular cell so as to enable the weaker signal to be differentiated and discarded so that only the stronger signal is used during the telephone call. To achieve this aim, in the construction of cellular radio systems the concept of Carrier-to-Interference Ratio (CIR) is used, meaning, essentially, the ratio of the carrier signal strength in one cell compared

25

with interfering signal strength received from a nearby cell using the same channel frequency.

5       The CIR may also be conveniently expressed  
in decibels where the actual signal strength is  
measured in Watts. Thus, if the strength of the  
carrier signal in a channel is measured to be, say,  
 $C=10 \times 10^{-7}$  mW, then C(in decibel expression) can be  
written to be 10 times the logarithm of the power  
10      ratio to 1 milliwatt. Hence:

$$C(\text{dBm}) = 10 \log \frac{10 \times 10^{-7} \text{ mW}}{1 \text{ mW}} \quad (1)$$

15                       $C(\text{dBm}) = 10 \log(10 \times 10^{-7})$                       (2)

$$C(\text{dBm}) = -60 \text{ dBm} \quad (3)$$

20      Similarly, if the strength of the interfering channel  
I is, say,  $5 \times 10^{-7}$  mW then we have

$$I(\text{dBm}) = 10 \log \frac{5 \times 10^{-7} \text{ mW}}{1 \text{ mW}} \quad (4)$$

25                       $I(\text{dBm}) = 10 \log(5 \times 10^{-7})$                       (5)

$$I(\text{dBm}) = -63\text{dBm} \quad (6)$$

Then since:

$$5 \quad \text{CIR} = 10 \log \left( \frac{10 \times 10^{-7} \text{mW}}{5 \times 10^{-7} \text{mW}} \right) \quad (7)$$

and:

$$10 \quad \text{CIR}(\text{dB}) = 10 \log \left( \frac{10 \times 10^{-7} \text{mW}}{1 \text{mW}} \right) - 10 \log \left( \frac{5 \times 10^{-7} \text{mW}}{1 \text{mW}} \right) \quad (8)$$

Therefore:

$$15 \quad \text{CIR}(\text{dB}) = C(\text{dBm}) - I(\text{dBm}) \quad (9)$$

$$\text{CIR}(\text{dB}) = -60\text{dBm} - (-63\text{dBm})$$

(10)

$$20 \quad \text{CIR}(\text{dB}) = 3\text{dB}$$

(11)

Thus, it will be seen that if the signal strengths of the carrier and interferer are expressed in Watts then the CIR is simply ten times the

25

logarithm of their ratio as defined in equation (7);  
whereas if the signal strengths of the carrier and  
interferer are measured in decibel milliwatts, the  
CIR is obtained by calculating their difference, as  
5 shown in equation (10).

Typically, in cellular mobile radio analog  
systems such networks require a CIR of greater than  
17 dB although it will be understood that the choice  
10 of this value is arbitrary and depends on the  
technology employed in the hardware used and how  
efficiently it is able to differentiate between  
signals received from identical channels but located  
in different cells.

15

In an ideal situation, the design of a  
cellular telephone network is relatively  
straightforward in that all that is required are  
short-range radio stations comprised of  
20 transmitters/receivers, often using common antennae,  
located at evenly spaced intervals over the entire  
geographical area required for the network, with each  
such station then defining the cell site centre of  
its respective cell. Propagation of electro magnetic  
25 radiation in such circumstances generally occurs

spherically outwards which necessarily means that if each station is positioned in the most efficient manner with respect to adjacent stations then a partially overlapping arrangement of cells results.

5 Although the true locus of signals receivable from each station transmitter defines a circular path around its antenna, it is usually convenient to consider in an ideal situation that each cell has an hexagonal shape and when planning networks of this  
10 kind it is usually convenient to draw out the geographical spread of the network with the use of hexagonal cells, which thereby appear to interlock with adjacent cells.

15 In the situation referred to above it will be apparent that there is effectively only one primary consideration when planning the geographical extent of such a telephone system, being a trade-off between the cost of installing and operating stations  
20 in each cell, as opposed to the end-user requirements for making telephone calls to or from each cell. Thus, the more geographically distant a cell becomes from a centre of human population, the less cost effective it becomes to maintain and operate a cell

25

from that location. Hence, the planning of such an ideal network is relatively straightforward.

5           However, in the real world, there are many  
other complicating factors affecting the design of  
cellular telephone networks which are brought about  
primarily by topography and demography, or the  
non-availability of ideal sites where stations can be  
situated. Topographical factors often arise in towns  
10   and cities with high rise buildings and/or natural  
geological features such as hills and valleys.  
Demographic factors result from variations in human  
population densities, particularly in and around  
towns and cities.

15

          The problems caused by variations in  
topography can generally be summed up as meaning that  
the ideal hexagonal shape for a cell cannot be  
assumed valid because there will be areas in such a  
cell which are blocked from receiving or transmitting  
20   radio frequency radiation as a result of the presence  
of buildings etc.. This problem can be solved by  
placing additional stations to cover the blind area  
within the cell, hopefully in the most economic  
25   fashion possible. Sometimes, it is even necessary to



install antennas inside buildings, particularly shopping malls and the like, where there is a high statistical probability that subscribers to the telephone network would wish to make or receive a  
5 telephone call. Alternatively, more than one antenna could be used in each cell, but located at different sector points within the cell to cover discrete sectors of the cell and thereby allow for as near complete coverage as is feasible, given the  
10 constraints dictated by the topography. Thus cells can be serviced by a single station, or split into cell-sectors, each with its own antenna, but all operating over the same bandwidth.

15                   Demographic considerations also play their part in complicating the design of such networks because areas of high population density obviously require a greater number of available channels in order to guarantee that a caller can make and a  
20 receiver can receive a call. Given that there are only a finite number of channels usually available for allocation to a cellular telephone network, it will be apparent that efficient design of the network is necessary in order to extract the greatest amount  
25 of use possible from the available channels.

Presently, the approach taken to the design of cellular telephone networks has generally relied upon trial and error, rather than by adopting a more scientific approach, except where topographical and demographical variations are insignificant. Even in networks which have been painstakingly and carefully designed to achieve the maximum efficiency out of the number of channels available, it is still necessary to constantly review and adjust cell design within the network in response to the construction of new buildings and the demolition of old ones. Minor changes to the topography or demography can sometimes be accommodated by placing additional stations at strategic locations but, over time, the cumulative effect may make it more efficient or economical to occasionally completely redesign the network by altering the number and position of the various stations or the channels allocated to them.

Conventionally, the approach taken to optimizing the allocation of channels for re-use in neighbouring cells has been to visually analyze a radio frequency signal strength contour map for each cell, and by comparing the contour map from one cell with that of another cell, to then make a judgement,

often based upon experience, on whether or not to re-use a particular channel from a choice of several which may be available for re-use.

5                    Obviously, if one cell receives a significant proportion of incoming radio frequency radiation from a neighbouring cell at a relatively high signal strength then it is impractical to re-use channels of the same frequency since there will be an  
10                    unacceptable level of interference. Difficulties, however, arise when comparing radio frequency contour maps of cells in order to try to determine for any given cell what channels are available for re-use with the minimum possibility of interference  
15                    occurring with neighbouring cells using the same channels. It may be clear from the radio frequency contour maps that certain particular channels are inappropriate for re-use, and at the other end of the scale it may be that certain other channels would be  
20                    available for use since there is little or no chance of interference arising. In between these two extremes is a spectrum of possibilities and a value judgement then has to be made as to which channels to reallocate or re-use.

25

The present invention seeks to overcome the problem of selection of channels for re-use in neighbouring cells by introducing statistical concepts which provide a more scientific approach to the selection process. In particular, the invention effectively provides a measurement of the level of confidence for the re-use of each channel between a worst-case scenario wherein 100% interference will be experienced from a neighbouring cell using the same frequency, to a position where there is no interference whatsoever and hence 100% confidence that there will be no interference when a telephone call is made or received. Using this concept in accordance with the method of the present invention it is possible to identify confidence levels for all of the channels in the network with respect to each cell so that when a choice has to be made as to which channels to re-use in other cells the choice can be made with reference to a scale of confidence ranging from 0% up to 100%.

In accordance with the invention there is provided a method of optimizing channel selection in a radio telephone network of the type utilizing a plurality of radio stations comprised of

transmitters/receivers and antennae arranged in a cell-like configuration, the method comprising the steps of:-

- 5 (a) defining a minimum acceptable level of carrier-to-interference ratio (CIR) for the network,
- 10 (b) subdividing the geographical area covered by the network into a large number of small sub-areas of generally equal shape and size,
- 15 (c) ascertaining the strength of signals from transmitters of respective stations within the network at at least one location within all or a large number of sub-areas,
- 20 (d) for each such sub-area and for each transmitter defining the average value of the ascertained signal strength as representing the average signal strength for the transmitter in all parts of that sub-area,
- 25 (e) defining the transmission source of the strongest such signal as the serving cell-site

centre for that sub-area and the signal itself  
as the carrier signal,

- 5 (f) defining the remaining such signals from other  
transmitters within the network as interfering  
signals and for each calculating the CIR with  
respect to the carrier signal for that sub-area,
- 10 (g) for each cell-site of the network aggregating  
the total number of sub-areas in which signal  
strengths have been ascertained and comparing  
the number of such sub-areas in which each CIR  
is above the minimum acceptable value with the  
aggregate total of sub-areas in the cell-site,  
15 to thereby determine the probability of no  
interference occurring in that cell with one or  
more signals received from other cell-sites  
within the network if the same channel is  
re-used, and
- 20 (h) when choosing a channel for use in a cell,  
selecting the one having the lowest probability  
of interference with signals from other cells  
using the same channel, thereby to optimize  
25 channel selection.

It will be understood that one or more of the steps referred to above and in the appended claims may be interchanged, for example if it is found to be more convenient to ascertain at various  
5 locations the value of signals received from various transmitters first and then define sub-areas and cell-sites accordingly. The method of the invention is therefore not intended to be sequentially limited and, similarly, it will be apparent that the method  
10 can be used to optimize channels selection even in new networks or networks which are completely re-designed and where no existing cell-sites have yet been allocated.

15 If the signal strengths are ascertained only once at each sub-area then obviously each value is also the average value and no separate averaging step is necessary.

20 The signal strengths of the various channels at the various locations within the network can be ascertained either by direct measurement or by predictive means such as by using mathematical models to calculate the likely propagation of radio  
25 frequency radiation. However, in cities with a high

density of high rise buildings mathematical calculation of radio frequency propagation becomes extremely complex and in such circumstances direct measurement is preferred.

5

Preferably, particularly when optimizing channel selection in radio telephone networks for use in cities, the geographical area covered by the network may be subdivided into layers of sub-areas of generally equal shape and size so as to accommodate variations in radio frequency propagation caused by the presence of buildings or other geographical features. Thus, one layer may correspond to ground level and the second layer may correspond to, say, a floor above ground level and so on. In this way, vertical abnormalities of radio frequency propagation can be accounted for and adjustments made to channel selection as necessary.

20 Conveniently, a grid system may be used to subdivide the geographical area covered by the network (using longitude and latitude) to define the sub-areas and where more than one layer is used one grid may directly overlay another.

25



Preferably, the likelihood of interference occurring in any particular cell with one or more signals received from other cell sites within the network if the same channel is re-used in that cell  
5 may be expressed as a level of confidence ranging from 0%, meaning that interference will occur whenever a call is made from whatever location within the cell site, to 100%, meaning that interference will never occur at any location within the cell  
10 site. Hence, the level of confidence for re-use of a channel at any point within the entire network can be calculated and expressed in the form of a look-up table so that for any one of perhaps several hundred available channels in a network then, depending upon  
15 the geographical position identified, there will exist a variety of options on whether or not to re-use any particular channel, with some channels having a low confidence level for re-use and others having a high level of confidence, perhaps nearing  
20 100%.

The advantage of such a system is that it does not rely upon an intuitive interpretation of radio frequency contour maps but more upon

25

statistical data obtained by direct measurement or calculation.

5 The method of the invention will now be described, by way of example only, with reference to the accompanying drawings in which:

10 Figure 1 is a radio contour map of a cell site within a conventional cellular telephone network,

Figure 2 is a radio coverage map of the cell site of Figure 1,

15 Figure 3 is a block diagram showing the principle steps involved in the method of the invention,

20 Figure 4 is a simplified schematic diagram showing a number of transmitters within a network and locations for which measurements of signal strength have been taken, including various sub-areas defined by grid lines over the territorial extent  
25 of the network,

Figure 5 is a further schematic diagram similar to that of Figure 4 but in which two layers of sub-areas are defined by grid lines,

5

Figure 6 is a table showing a list of signal strength measurements taken at various locations within a sub-area,

10

Figure 7 is a table showing the average of the signal strengths of Figure 6,

15

Figure 8 is a table showing in percentage terms the probability of interference occurring through the use of the same channel at various cell sites within the network,

20

Figure 9 is a probability distribution graph of a collection of CIR's between two transmitters,

25

Figure 10 shows the cumulative probability distribution of the graph of Figure 9, and

Figure 11 is a table corresponding to Figure 8 but expressing probability of interference in dB.

5 Referring firstly to Figure 1 there is shown a radio contour map of a cell site S1 located within a large city having a multitude of high-rise buildings and/or geographical features which block or hinder the typically spherical propagation of electro  
10 magnetic radiation. The map includes blank areas which typically signify the presence of buildings, or areas which are otherwise inaccessible for taking measurements of signal strength. The locations of other cell-sites S2, S3, S4 and S5 in the network are  
15 also shown.

But for the presence of buildings and assuming that the topography was completely flat the contour map would show signal strength diminishing at  
20 a rate solely depending upon the distance from the transmission source. In practice, however, a typical contour map such as the one depicted is highly irregular in shape and extent. It will be understood that the contour map of Figure 1 depicts the  
25 variation in signal strength over distance in respect

of a transmitter placed at the centre of the cell site and that for each cell site on the map a different contour would result such that if contour maps for a number of adjacent or neighbouring cell sites were overlaid one on top of the other the resulting combined contour map would be extremely complex and difficult to interpret.

In Figure 2 there is shown a radio coverage map of cell site S1 corresponding to the contour map of Figure 1 but showing only those areas having signals stronger than those receivable from adjacent cells so that the map shows those areas where the cell site S1 provides dominant signal strength to make and receive radio telephone calls. As mentioned previously, it is generally accepted that in cellular mobile radio analog systems, a signal strength difference greater than 17dB is necessary to ensure that the telephone equipment within the cell can differentiate the carrier signal from interferer signals of the same frequency emanating elsewhere.

Turning to Figure 3 there is shown a block diagram of a schematic arrangement in which the preferred method of the invention can be realized in

which it will be seen that the first step can be achieved in either of two ways, either by direct measurement of signal strength or by calculating the signal strength at various points over the entire network. Prior to this, the geographic extent of the network is subdivided into sub-areas and in the example shown with reference to Figure 4 it will be seen that a square grid system is used where each of the sub-areas is of the same size and shape. In practice, the sub-areas are in fact much smaller than those depicted in Figure 4 and may typically measure 50 metres by 50 metres so that for each cell of the network a large number of sub-areas can be defined. In general, the larger the number of sub-areas defined, the greater the statistical accuracy is of the method in accordance with the invention. The grid is preferably defined and the sub-areas individually identified using latitude and longitude.

Predictive calculation of the signal strength in each sub-area can be used with reasonable accuracy over generally flat terrain including areas of water but becomes less reliable with increasing irregularity of topography and/or distance from each station within the network. Thus, in and around

cities direct measurement of signal strength is preferred to calculation and for this purpose a specialized road-going vehicle can be used equipped with conventional instruments and tracking apparatus  
5 in order to determine at any point in time the exact geographical location of the vehicle and to take at regular intervals of, say, 10 or 20 metres, measurements of signal strengths being received from nearby transmitters, the vehicle equipment  
10 automatically recording data as it moves along for later analysis. This will generally mean that such a vehicle will have to travel along roads and other areas where vehicular access is possible throughout the entire network in order to obtain a meaningful  
15 quantity of data which can then be used to provide the basis for the statistical method of the invention. In areas where vehicular access is impossible then measurements may have to be taken individually, or mathematical methods may be used  
20 instead in order to ascertain the likely signal strength at such inaccessible parts of the network. The greater the number of sub-areas covered, the greater the statistical accuracy of the method.

25

Once the data is collected, by whatever means, the mean signal strength in each sub-area for each transmitter is calculated and the transmission source of the strongest such averaged signal is then defined as being the serving cell site centre for that particular sub-area and therefore the signal itself is defined as being the carrier signal. The remaining signals are thereafter defined as interferer signals so that it is then possible to simply calculate the carrier to interference ratio with respect to each of the interferers for the sub-area. Obviously, the geographical extent of the cell includes all sub-areas in which the transmission signal for that cell is the strongest, but the cell itself may extend to other areas where measurements may not have been taken.

For each sub-area in each cell the average CIR with respect to nearby transmitters is therefore known and, accordingly, will be either above or below the minimum acceptable value of CIR for the network. For all sub-areas in the cell where a CIR value is known the number of such sub-areas is then aggregated and the percentage having a CIR value above the minimum acceptable is thereafter determined, in



respect of each of the interferers, from which it  
will be understood that this percentage in reality  
reflects a level of confidence in whether or not  
there is likely to be interference in that cell if  
5 the same channel as is used in a neighbouring cell is  
re-used. Thus, when choosing which channel to re-use  
it is simply necessary to choose the one with the  
highest percentage of acceptable CIRs, rather than  
having to rely upon the "look and feel" of radio  
10 contour maps, which has traditionally been the method  
used.

Turning now again to Figure 4 it will be  
seen that in the simplified arrangement shown  
15 measurements have been taken, (indicated by an "X")  
at various points over several sub-areas and at each  
such point measurements have been taken  
corresponding, respectively, to signals received from  
transmitters at cell sites S1 to S5. As explained  
20 above, for each sub-area the signal strengths for  
each transmitter are averaged out for each sub-area  
and the source of the strongest signal is thereafter  
defined as being the cell site centre for that  
sub-area.

25

In Figure 5 the two dimensional grid network is expanded to three dimensions by introducing a second layer overlying the first. More than two layers could, of course, be used depending upon the prevalence of, particularly, high rise buildings in the network although it will be appreciated that taking measurements of signal strengths at locations on the second and any successive layers is more difficult than taking measurements of signal strengths at ground level.

Turning now to Figure 6 there is shown a table of actual measurements (expressed in dBm) taken in one particular sub-area of a network where a total of four measurements have been made for each of five transmitters in cell sites S1 to S5, such measurements being taken at various positions of latitude and longitude within the sub-area. At position 22.309818 North and 114.169511 East the signal strength of the transmitter of S1 was recorded as -90dBm, that of S2-115dBm, S3 at -109dBm and S4-114dBm, and so on.

In Figure 7 there is shown a table in which the data collected and recorded in Figure 6 has been

averaged out, including the average location and, of course, the mean signal strength for each of the transmitters from S1 to S5. In practice, most networks include a large number of transmitters at a correspondingly large number of stations and hence in reality a very large number of measurements and calculations would have to be made to cover the entire network, for which purpose computer processing of the data is almost indispensable.

10

As mentioned with reference to Figure 3, the averaged data for each sub-area is then collated with reference to other sub-areas in each cell so that if, say, there are 100 sub-areas in a given cell and the measurements taken indicate that in 90 of those sub-areas the CIR with respect to a neighbouring transmitter is below the acceptable value of 17dB then it follows that this can be expressed as only a 10% confidence level of there not being interference anywhere in the cell should the same channel of the neighbouring cell be re-used in that cell. Conversely, if 90 out of the 100 sub-areas measured show that the signal strength from a neighbouring transmitter is relatively low so that the CIR is above the acceptable level of 17dB then

25

this translates into a 90% level of confidence that  
if that same channel is re-used in the cell then for  
most of the time no interference will be experienced.  
Obviously, the nearer one gets to 100% then the  
5 greater the certainty that no interference will  
occur.

Using these concepts it is therefore  
possible to tabulate in percentage terms the level of  
10 confidence of re-use of channels within the network  
for each cell or cell-sector so that it is possible  
to produce a look-up table of the type as is shown in  
Figure 8. In the table it will be seen that  
percentage levels of confidence have been calculated  
15 for each transmitter with respect to other  
transmitters in the network and, as is to be  
expected, those transmitters furthest away from each  
other usually produce higher levels of confidence  
and, conversely, the nearer transmitters are to each  
20 other the lower the level of confidence. In the  
table, and looking initially at the transmitter of  
S1, it will be seen that with respect to itself and  
by definition there is 0% confidence of interference  
not occurring by the re-use of the same channel. The

25

same is true of the transmitter at S2 with respect to itself and so on.

Referring, for example, to cell site S3 it  
5 will be noted that there is a 97% confidence level  
with respect to cell site S5, meaning that if the  
same channel is re-used in S5, 97% of the total  
sub-areas covered by S3 are free of interference.  
Conversely, there is only 3% probability, on average,  
10 in the S3 coverage area of interference occurring as  
a result of cross talk. Alternatively, if the same  
channels are used by S3 and S5, 95% of the S5  
coverage area will anticipate no interference and  
only 5% of the S3 area is likely to suffer from  
15 interference.

The table shown in Figure 8 is necessarily  
simplistic, bearing in mind that a typical cellular  
telephone network can have over 300 individual  
20 channels within the radio frequency bandwidth  
allocated to it. For a single large city, there may  
be as many as 100 cell sites, each being allocated a  
number of channels dependent upon the user  
requirements in each cell and, of course, including  
25 some channels which are being re-used elsewhere

within the network by other cell sites. Whilst this illustrates the complexities involved in the conventional methods of trying to optimize channel selection and cellular telephone networks, it also illustrates how the statistical method of the present invention can be used for providing a sound basis for making a choice as to which channels to reallocate elsewhere, and where they can be most efficiently allocated.

10

Figure 8 illustrates how the confidence level for reusing channels throughout the network can be expressed in percentage terms although it will be appreciated that other ways of expressing whether or not interference is likely could be used. The percentage method shown above shows the degree of confidence of the CIR being above the acceptable value of 17dB. An alternative is to express the CIR value in dB if the confidence level is fixed to a predetermined acceptable percentage of, say, 90%. In Figure 9 there is shown a probability distribution of a collection of CIR data between two transmitters each located at two different cell sites in the network. In this illustrative example it will be seen that there is a low probability of the CIR being

15

20

25

significantly below 17dB and, conversely, there is also a low probability of the CIR being significantly above about 35dB. Most of the CIR values lie between about 20dB and 35dB.

5

If the probability distribution shown in Figure 9 is expressed cumulatively, then we have the graph shown in Figure 10 in which, again, only a small percentage of the sample contains a CIR of less than 17dB. In the graph the 10% percentile represents a 90% confidence level and gives a CIR reading of 23dB. Accordingly, the confidence level of 80%, 70% and 60% are, respectively, represented by 20%, 30% and 40% percentiles respectively. The larger the CIR value, the higher is the confidence level. By applying the percentile method and again using 10% as the chosen percentile, Figure 8 can therefore be expressed in a different manner, as is shown in Figure 11. In the table it will be seen that as with the percentage levels of confidence shown in Figure 8, we now have confidence expressed in decibels and, as is to be expected, those transmitters furthest away from each other usually produce a higher level of dB than those which are relatively near to each other, although this is not

10

15

20

25

always the case due to variations in radio  
propagation cause by the presence of buildings, or  
areas of water which tend to increase the distance  
over which the radio frequency being can propagate  
5 without serious degradation. Looking initially at  
the transmitter of S1 it will be seen that with  
respect to itself and by definition the CIR is 0dB.  
Conversely, with respect to S1 the CIR is 29dB  
meaning that if the same channel is used in both of  
10 these cell sites then there is little risk of  
interference occurring.

15

20

25



### Claims

1. A method of optimizing channel selection in a radio telephone network of the type utilizing a plurality of radio stations comprised of transmitters/receivers and antennae arranged in a cell-like configuration, the method comprising the steps of:-
- 5
- 10 (a) defining a minimum acceptable level of carrier-to-interference ratio (CIR) for the network,
- (b) subdividing the geographical area covered by the network into a large number of small sub-areas of generally equal shape and size,
- 15
- (c) ascertaining the strength of signals received from respective stations within the network at at least one location within all or a large number of sub-areas,
- 20
- (d) for each such sub-area and for each transmitter defining the average value of the ascertained signal strength as representing the average
- 25

signal strength for the transmitter in all parts  
of that sub-area,

- 5 (e) defining the transmission source of the  
strongest such signal as the serving cell-site  
centre for that sub-area and the signal itself  
as the carrier signal,
- 10 (f) defining the remaining such signals from other  
transmitters within the network as interfering  
signals and for each calculating the CIR with  
respect to the carrier signal for that sub-area,
- 15 (g) for each cell-site of the network aggregating  
the total number of sub-areas in which signal  
strength have been ascertained and comparing the  
number of such sub-areas in which each CIR is  
above the minimum acceptable value with the  
aggregate total of sub-areas in the cell-site,  
20 to thereby determine the probability of no  
interference occurring that cell with one or  
more signals received from other cell-sites  
within the network if the same channel is  
re-used, and

25

(h) when choosing a channel for use in a cell,  
selecting the one having the lowest probability  
of interference with signals from other cells  
using the same channel, thereby to optimize  
5 channel selection.

2. The method according to Claim 1 further  
characterized in that the sub-areas are defined by a  
grid system using longitude and latitude to identify  
10 each such sub-area.

3. The method according to Claim 1 or Claim 2  
in which layers of sub-areas of generally equal shape  
and size, but vertically separated, are provided.  
15

4. The method according to any one of the  
preceding claims further characterized in that the  
probability of interference occurring in a cell in  
which the same channel is being used elsewhere within  
20 the network is expressed as a level of confidence.

5. The method according to Claim 5 in which  
the confidence is expressed in the form of a look-up  
table.  
25

6. The method according to Claim 4 or Claim 5  
in which the confidence is expressed as a percentage,  
0% corresponding to a high probability that  
interference will be experienced and 100%  
5 corresponding to a very low or zero probability that  
interference will be experienced.

7. The method substantially as hereinbefore  
described with reference to and as shown in Figure 3.

10

8. The method according to Claim 4 or Claim 5  
in which the confidence is expressed as a CIR value  
above or below the minimum acceptable CIR for the  
network.

15

9. The method according to Claim 8 in which  
the confidence is expressed in dBs.

10. The method substantially as hereinbefore  
20 described with reference to and as shown in Figure  
11.

25

**Patents Act 1977**  
**Examiner's report to the Comptroller under**  
**Section 17 (The Search Report)**

Application number

GB 9216044.9

**Relevant Technical fields**

(i) UK Cl (Edition ) H4L LDSD LDSF

(ii) Int Cl (Edition 5 ) H04B 7/24 7/26 17/00

**Databases (see over)**

(i) UK Patent Office

(ii)

**Search Examiner**

S J DAVIES

**Date of Search**

30 OCTOBER 1992

Documents considered relevant following a search in respect of claims 1-10

Category (see over)	Identity of document and relevant passages	Relevant to claim(s)
A	GB 2234142 A (NEC) see eg page 2 line 11 - page 3 line 5	

Category	Ident. of document and relevant passages	Relevant to claim(s)

**Categories of documents**

**X:** Document indicating lack of novelty or of inventive step.

**Y:** Document indicating lack of inventive step if combined with one or more other documents of the same category.

**A:** Document indicating technological background and/or state of the art.

**P:** Document published on or after the declared priority date but before the filing date of the present application.

**E:** Patent document published on or after, but with priority date earlier than, the filing date of the present application.

**&:** Member of the same patent family, corresponding document.

**Databases:** The UK Patent Office database comprises classified collections of GB, EP, WO and US patent specifications as outlined periodically in the Official Journal (Patents). The on-line databases considered for search are also listed periodically in the Official Journal (Patents).